



# 6234-C / 6234A-C

## SOFT SERVE FREEZER

Two Flavor, Countertop, Dual Controls  
A: Pump Feed Model



Most **Compact & Versatile**  
two-flavor countertop model with  
independent intelligent controls  
for ice cream and frozen yogurt

### Fast Freeze Down

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption

### Digital Control and Display

Microprocessor control provides access to system settings and additional functions. Digital interface displays critical info as system status, temperatures, dispense count, errors, etc.

### Operation Logging

Logs every operation and error to provide history and data for easy troubleshooting

### Auto Programming

Allows automatic switching of operation modes based on preset schedules

### Hopper Agitators

Maintain product consistency and prevent product separation

Ideal for any restaurants, convenience stores, dessert stands and delis to serve ice cream and gelato. Small foot print and low energy consumption help reduce operating cost.

### Soft System Start

Slow motor start reduces equipment noise and stress on drive train

### Direct Drive Transmission

Eliminates consumable moving parts and increases transmission efficiency

### Defrost for Cleaning

Increases efficiency during cleaning by heating frozen product in cylinder

### Quick Freeze

Turn on freeze immediately to freeze down to serving viscosity when quick service is required after long idle period

### Self Closing Valve with Speed Control

Automatically prevents product overflow after dispense; Provides flexibility in dispense rate control


### Safety Protections

- Low temperature and motor overload shutoffs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating



# 6234-C / 6234A-C

# SOFT SERVE FREEZER

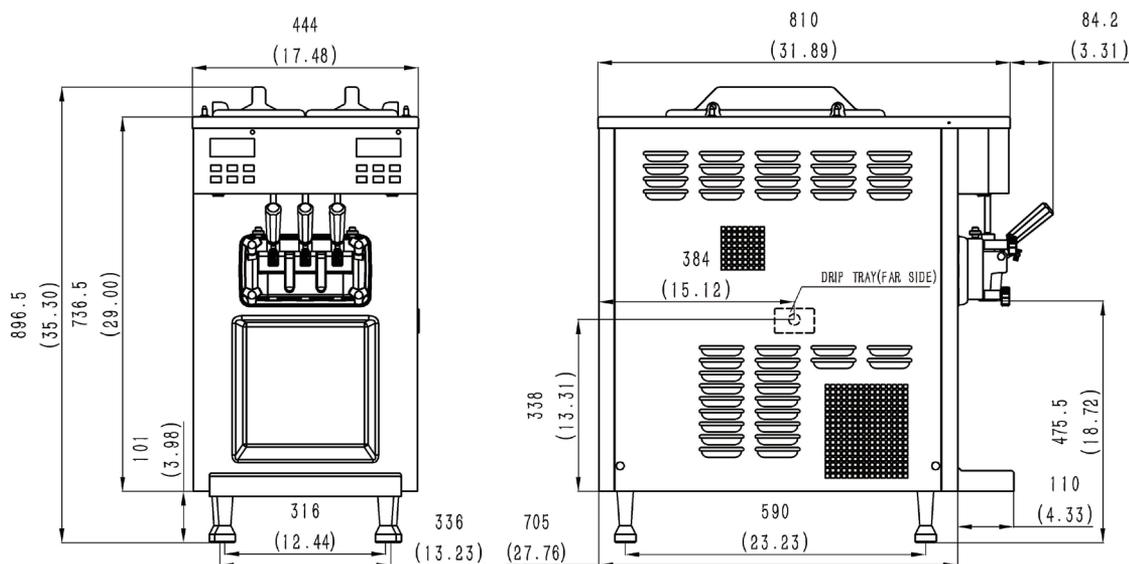

## SPECIFICATIONS

|                            |                   |
|----------------------------|-------------------|
| Flavors                    | 2 + Twist         |
| Freezing Cylinders         | 2 x 1.2L / 1.3qt  |
| Mix Hoppers                | 2 x 8L (5L for A) |
| Output Capacity (80 grams) | 200 serves/hr     |
| Clearance Requirements     | 152mm/6" on back  |

## Weight

|          | Kg/lb (Gravity)      | Kg/lb (Pump) |
|----------|----------------------|--------------|
| Net      | 126 / 278            | 135 / 298    |
| Shipping | 141 / 311            | 150 / 331    |
| Volume   | 0.47 CBM / 16.61 CBF |              |

## Dimensions

|        | Net (mm/in) | Shipping (mm/in) |
|--------|-------------|------------------|
| Width  | 444 / 17.5  | 530 / 20.9       |
| Depth  | 705 / 27.8  | 870 / 34.3       |
| Height | 897 / 35.3  | 1020 / 40.2      |

## Electrical

|              | Power (kW) | Total Amps (A) | Fuse (A) |
|--------------|------------|----------------|----------|
| 220-240/50/1 | 2.0        | 10             | 16       |
| 208-230/60/1 | 2.1        | 11             | 15       |

## FEATURES

|                                 |                 |
|---------------------------------|-----------------|
| Control Systems                 | Double, Digital |
| Refrigerated Hoppers            | ✓               |
| Hopper Agitators                | ✓               |
| Temperature Display             | ✓               |
| Standby Mode                    | ✓               |
| Auto Closing Dispensing Valves  | ✓               |
| Dispensing Speed Control        | ✓               |
| Low Mix Indicator Light & Alarm | ✓               |
| Low Temperature Protection      | ✓               |
| Motor Overload Protection       | ✓               |
| High Pressure Protection        | ✓               |
| Defrost & Quick Freeze          | ✓               |
| Soft Start                      | ✓               |
| Direct Drive Pump (A only)      | ✓               |

## AVAILABLE OPTIONS

|                         |   |
|-------------------------|---|
| Top Air Discharge Chute | ✓ |
|-------------------------|---|

• Above specifications are subject to change without notice