



FABRICANTES DE
MOLINOS DE CAFÉ

MANUFACTURERS
OF COFFEE GRINDERS

Molino de café profesional
para todo tipo de cafés

Professional coffee grinder
for all types of coffee.

LUXOMATIC 500W ALUMINIUM

COLLECTION ON DEMAND

TECHNICAL CHARACTERISTICS 0-500g/3' Max 4Kg

VOLTAGE: 230V / 220V / 110V
 FREQUENCY: 50Hz / 60Hz
 PHASES: 1 (monophase)
 RPM: 1.300 / 1.600
 CURRENT: 2,1A / 4,7A
 CAPACITOR: 16µf / 55µf
 POWER: 0,37Hp / 497W
 PROTECTION RATING: IP21
 MOTOR SUPPLIED WITH THERMAL PROTECTOR
 MAXIMUM OPERATING TIME: 30min.


TEMPERED STEEL GRINDING WHEELS,(62HRc) ø 65mm
 LIFESPAN OF GRINDING WHEELS: 500Kg
 HOPPER CAPACITY: 1Kg
 HOPPER OPTION: 2Kg

MULTI-LANGUAGE TOUCH SCREEN
 SELECTION OF 1 OR 2 INSTANT GROUND COFFEE OR CONTINUOUS GROUND
 COFFEE COUNTER PARTIAL OR TOTAL
 ASSISTANT TIMER OF THE GRINDING POINT
 DIMENSIONS WIDTH x LENGTH x HEIGHT: 285X405X625mm
 WEIGHT: 17,5Kg
 AIR NOISE: 55dB

Diseñado bajo directiva 89/392 CE.



Grinding blades in tempered steel
(62HRc) ø 65mm.

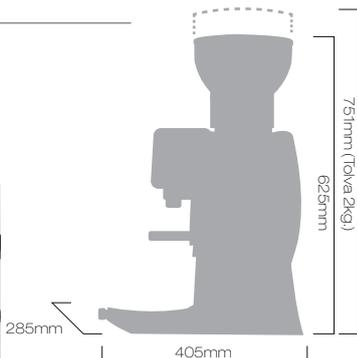

GREY METALLIC SILVER SNOW WHITE CHROME SILVER CHROME GOLD.



55dB



MAIN ATTRIBUTES

Hopper (1kg) made of unbreakable and non-deformable material (co.poliéster), with fast lock system and self-leveling when off the coffee grinder with the possibility of cleaning in a dishwasher at 90°C. – Micrometric regulation of the coffee grind using a regulatory pawl. – New expulsion system for the ground coffee (always living the grinding cavity clean when the coffee grinder stops). – Touch screen for easy programming and use (Language selection - Adjustment of the grinding program for each dose – Selection of 1 dose, 2 doses or continuous grinding – Coffee counter partial or total). – Integrated coffee tamper with mobile positioner (optional: coffee press integrated in the body). – Aluminium bodywork made in two parts, especially designed for ventilation, with –oating attachment of the inner motor body. – Bodywork nished in painted metallic silver-grey, snow white, chromed gold or chromed silver. – Motor assembly with an anti-vibration system using a pneumatic ring. – Silencer 500W motor with internal auto-ventilation, “55dB”. – Hardened steel grinding blades (62/65HRc) 65mm in diameter.

Optional: Personalisation system with chromed plaque on the back of the grinder. – Admits hopper of 2 kg. – Titanium-coated burrs (62/63 HRc) 65mm diameter, 2.000 kg. – Red speed coated burrs (62/63 HRc) 65mm diameter, 3.000 kg. – Coffee press integrated in the body.

