

1400 PLUS 1400 litres



Characteristics



A Refrigeration unit

Sparblock plug-in - monobloc ventilated system

B Evaporator

Treated by cataphoresis, 316L stainless steel coil

C Controllore

Capacitive touch screen

D Door

Thickness 60mm, reversible right/left opening, self-closing 110° opening, removable double chamber magnetic gasket

E Insulation thickness

60mm - HFO polyurethane (no CFC, no HCFC)

F Internal finish

AISI 304 stainless steel

G External finish

Protected stainless steel, galvanized back panel and top panel

J Floor support

Stainless steel feet, galvanised external bottom panel

K Rounded corners/removable parts



For easy cleaning

N Lighting


Standard

R Lock

con chiave di serie

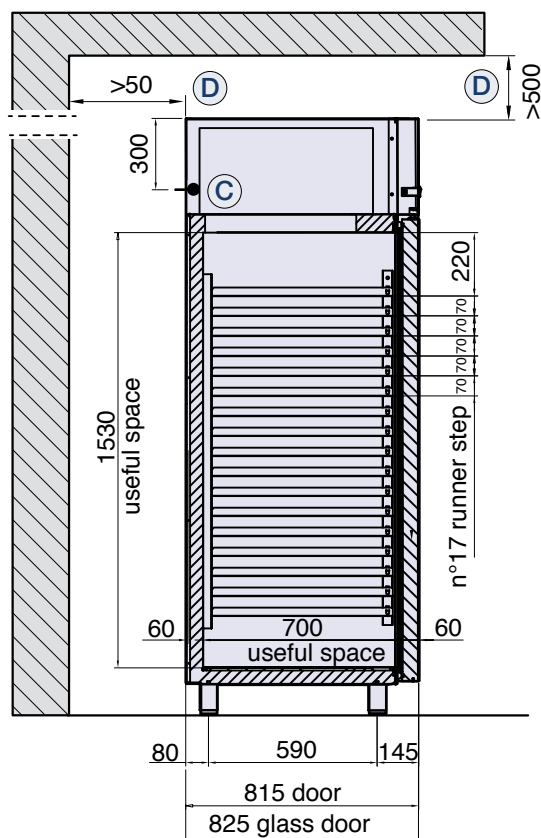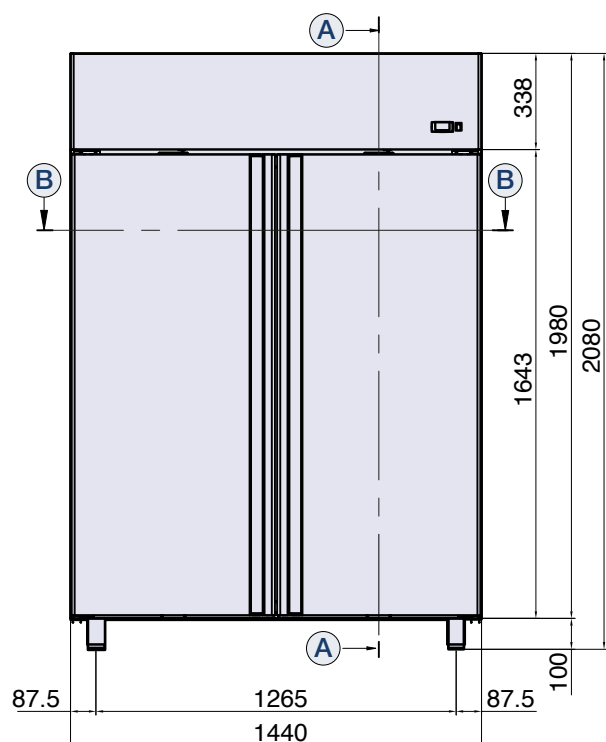

A-A

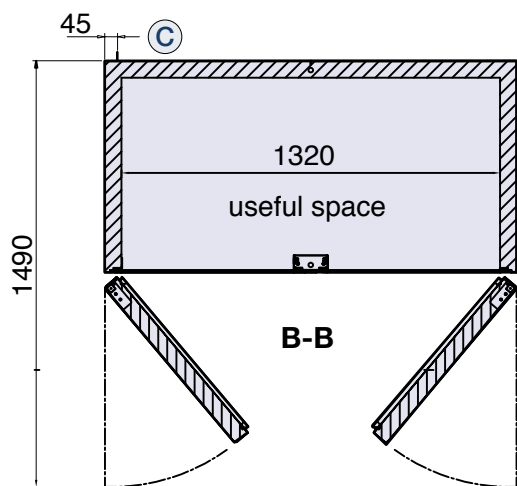

B-B

A Section plane


B Section plane

C Power cable outlet (length 2 m)

WARNING! While installing, have a qualified electrician connect it to an electrical panel.

D Minimum distances

WARNING! The distance from hot appliances (e.g. fryers or ovens) must be at least 50 cm.

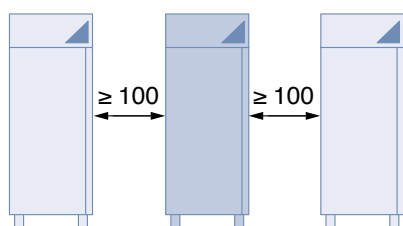

Technical specifications

Temperature (°C)	 0/+10	 -2/+10	 -18/-22	 -18/-22	 0/+10	 -18/-22
Model	PPCC140TN	PPCC140T2	PPCC140BT	PPCC140BTHD	PPCC140TNMR	PPCC140BTMR
Doors						
Dimensions (mm) L x D x H	1440 x 815 x 2080	1440 x 815 x 2080	1440 x 815 x 2080	1440 x 815 x 2080	1440 x 815 x 2080	1440 x 815 x 2080
Packaging (mm) L x D x H	1465 x 860 x 2240	1465 x 860 x 2240	1465 x 860 x 2240	1465 x 860 x 2240	1465 x 860 x 2240	1465 x 860 x 2240
Refrigerant	 R134a	 R134a	 R507 (R404a)	 R507 (R404a)	 R134a	 R507 (R404a)
Absorption (W)	510	510	770	770	30	30
Voltage (V-Hz)	230-1 50/60Hz	230-1 50/60Hz	230-1 50Hz 230-1 60Hz	230-1 50Hz 230-1 60Hz	230-1 50/60Hz	230-1 50Hz 230-1 60Hz
Net weight (kg)	178	179	189	189	163	166
Gross weight (kg)	200	201	211	211	185	188
Number of trays	6	6	6	6	6	6



Dal Mec by Dal Santo srl
via Sant'Anna, 40 • 31050 Fossalunga di Vedelago (TV) • Italy
www.dal-mec.it • info@dal-mec.it

