

SERIES	PRODUCT FAMILY	VERSION	MODEL
900	ELECTRIC RANGES	ELECTRIC	NECE94G

DESCRIPTION

ELECTRIC RANGE 4 SQUARE HOTPLATES ON OPEN MODULE



TECHNICAL DATA:

STRUCTURE	OPEN BASE	PLATE SIZE	300X300 mm
WIDTH	800 mm	NR. COOKING ZONES	4
DEPHT	900 mm		
HEIGHT	900 mm		
NET WEIGHT	95 kg		
VOLUME	0.9 m3		
ELECTRIC POWER	16 kW		
PHASE	3N		
FREQUENCY	50/60 Hz		
VOLTAGE	400 V		

SERIES	PRODUCT FAMILY	VERSION	MODEL
900	ELECTRIC RANGES	ELECTRIC	NECE94G


FEATURES:

Electric Range with 4 hotplates, Monoblock unit on open base. Pressed stainless steel top (AISI 304), thickness 20/10, pre-fitted for head-to-head connection and installation of the water column (accessory). Top with collection basin for liquids. 4 square cast iron hotplates 30x30 cm, with 4 kW output each, hermetically sealed to top. Heat is set by using 7-position selector switch. An orange signal light switches on when heating is activated. Hotplates equipped with automatic reset safety thermostat activated when the pan used on the appliance is unsuitable or there is no pan at all. Signal light checks whether the appliance is operating correctly. Lower open compartment. Height-adjustable feet in stainless steel.

OPTIONAL ACCESSORIES:

SERIES	PRODUCT FAMILY	VERSION	MODEL
900	ELECTRIC RANGES	ELECTRIC	NECE94G

INSTALLATION SCHEME

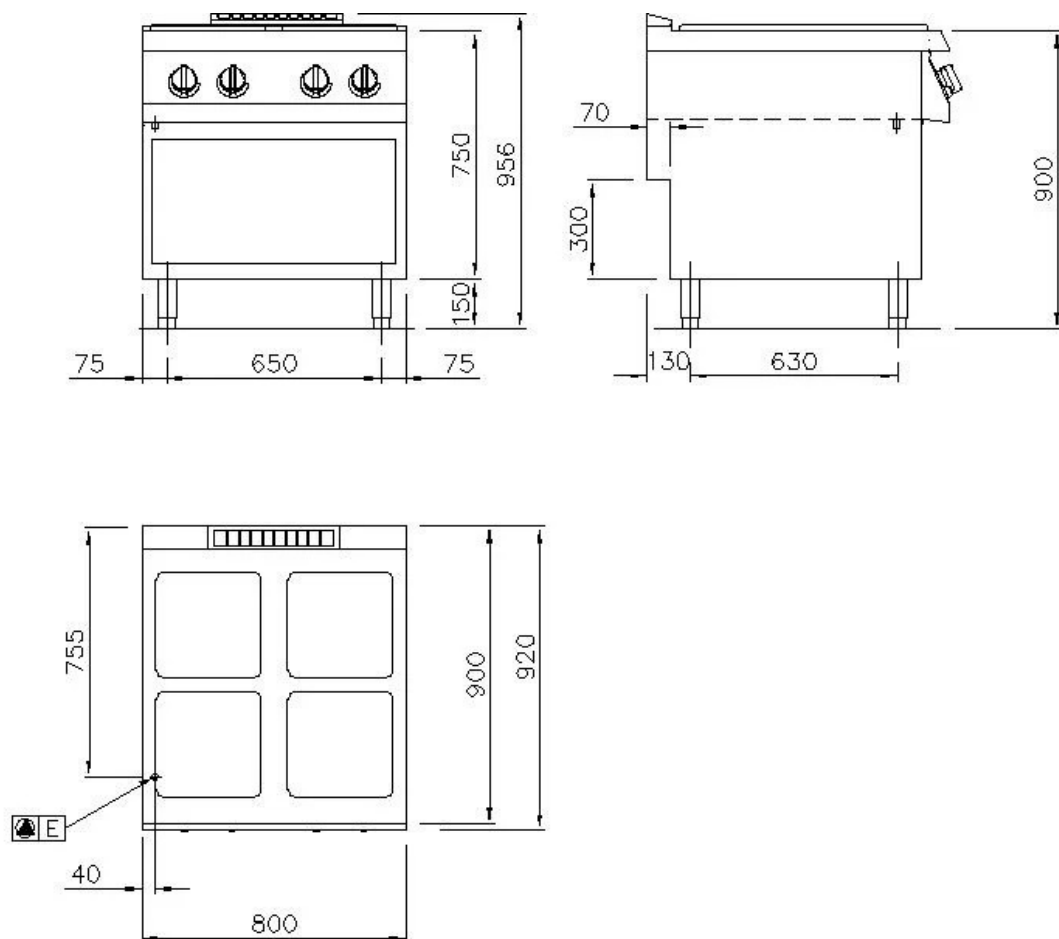

	E1	SOCKET
	AF	COLD WATER
	AC	HOT WATER
	G	GAS
	S	DRAINING

400 V

3N

NOTES FOR THE INSTALLER:

All water and gas connections must be fitted with a shut-off valve or ball valve.
Main gas connections must be provided of closing gate device.

Gas connections must not use welded tubes.

Gas connections must be jacketed according to current rules in the country.

Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght (except where otherwise required in the drawing).

All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.
All electric connections must be provided of main switch.

The specification shown in this document are to be considered not bounding.

The company reserves the right to make technical changes at any moment.