

# Gas Griddle

Gas fry-top with sloping hotplate

NEBG94GLR

900 line


**SILKO**  
IDEAS. WELL DONE

Gas fry-top gas with two cooking zones with sloping hotplate, versions: smooth, ribbed, 2/3 smooth 1/3 ribbed, constructed in Aisi 304 stainless steel. 20/10 thick stainless steel top. Hotplate recessed 40 mm compared to worktop, fully welded construction for guaranteed ease of cleaning. Satin finish cooking surface with 65 mm cold zone at front of hotplate. Round drain hole for grease, diam. 40 mm. Grease collection tub with 2,5 litre capacity.

Heating by means of steel burner with stabilized flame having 2 branches and 4 rows of flames for each zone, complete with pilot flame and safety thermocouple. Gas supply controlled by safety tap with thermocouple. Cooking temperature controlled manually with adjustment from 200 to 400 °C. Ignition by means of piezoelectric device with waterproof cap. Cooking surface 745x700 mm. 800 mm open base. Appliance equipped with height adjustable feet in stainless steel. Scraper for hotplate supplied.



Width mm.:	800
Depth mm.:	900
Height mm.:	900
Weight kg.:	-
Volume m³:	1
Voltage: El.	-
Power kW.:	-
Gas Power (kw):	14

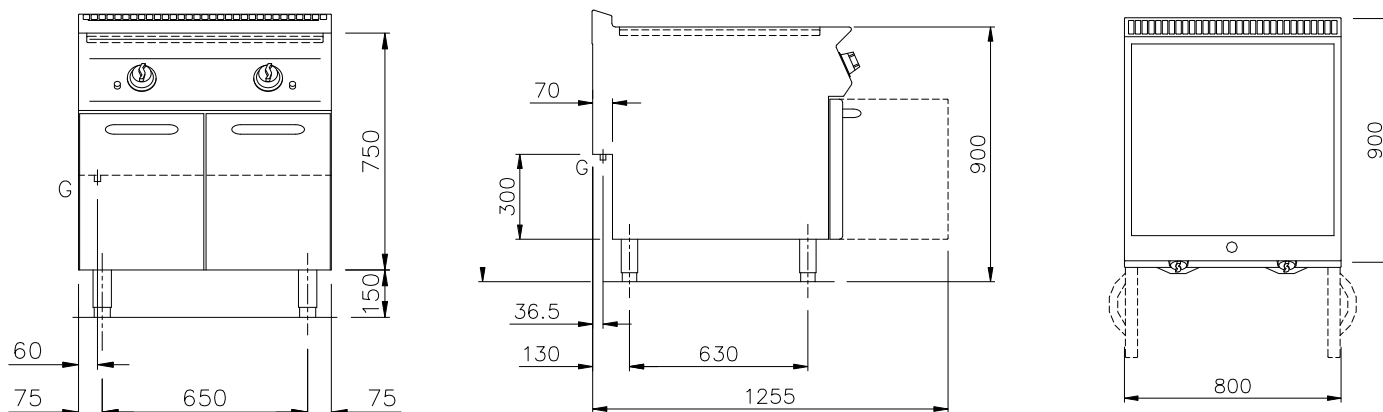

## NOTE

- All dimensions reported on the drawing are meant with finished tiled floor and side walls
- Main gas connections must be provided of closing gate device
- Mass connections must not use welded tubes
- Gas connections must be settled according to current rules in the country
- Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter length (except where otherwise required in the drawing) - All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug
- All electric connections must be provided of main switch

Silko - Ali S.p.A.  
Via Cal Larga, 8  
Z.I San Giacomo di Veglia  
31029 Vittorio Veneto  
(TV) ITALY  
T (+39) 0438 911930  
F (+39) 0438 506291  
info@silko.it

www.silko.it