

SERIES	PRODUCT FAMILY	VERSION	MODEL
900	FRYER	GAS	NEFG94223

DESCRIPTION

GAS FRYER 2 WELLS 23+23 LT.



TECHNICAL DATA:

STRUCTURE	FLOOR	WELL CAPACITY	23 LT.
WIDTH	800 mm	WELL DIMENSIONS	340x420x200 mm
DEPHT	900 mm		
HEIGHT	900 mm		
NET WEIGHT	127 kg		
VOLUME	0.9 m3		
GAS POWER	42 kW		

SERIES	PRODUCT FAMILY	VERSION	MODEL
900	FRYER	GAS	NEFG94223

FEATURES:



Gas Fryer, double well, Monoblock unit on cupboard with hinged door. Stainless steel top (AISI 304) thickness 20/10, pre-fitted for head-to-head connection. Pressed wells made of stainless steel AISI 304, with radiused inner profile. Well capacity in litres 23+23. Wells with wide expansion area in the front part for oil and foam and extended cooling area in the front part for collection of food particles. Heating by means of stainless steel burners with optimized flame positioned outside the well. Heat adjustment via thermostatic safety valve with thermocouple. Ignition of the main burner via pilot burner. Piezoelectric ignition with waterproof cap on control panel. Oil temperature inside the well controlled via mechanical thermostat, with a setting range between 100 and 185 °C. Manually resettable safety thermostat. Extractable filter, basket and lid and collector for drain cock included. Height-adjustable feet in stainless steel.

OPTIONAL ACCESSORIES:

• Basket 1/1 for 22 and 23 lt. well.	ECF22
• COLLECTOR FOR FRYING RESIDUE	NXFIV23G
• DEFLECTOR FOR BATTERED FOOD	NX9DF23

SERIES	PRODUCT FAMILY	VERSION	MODEL
900	FRYER	GAS	NEFG94223

INSTALLATION SCHEME

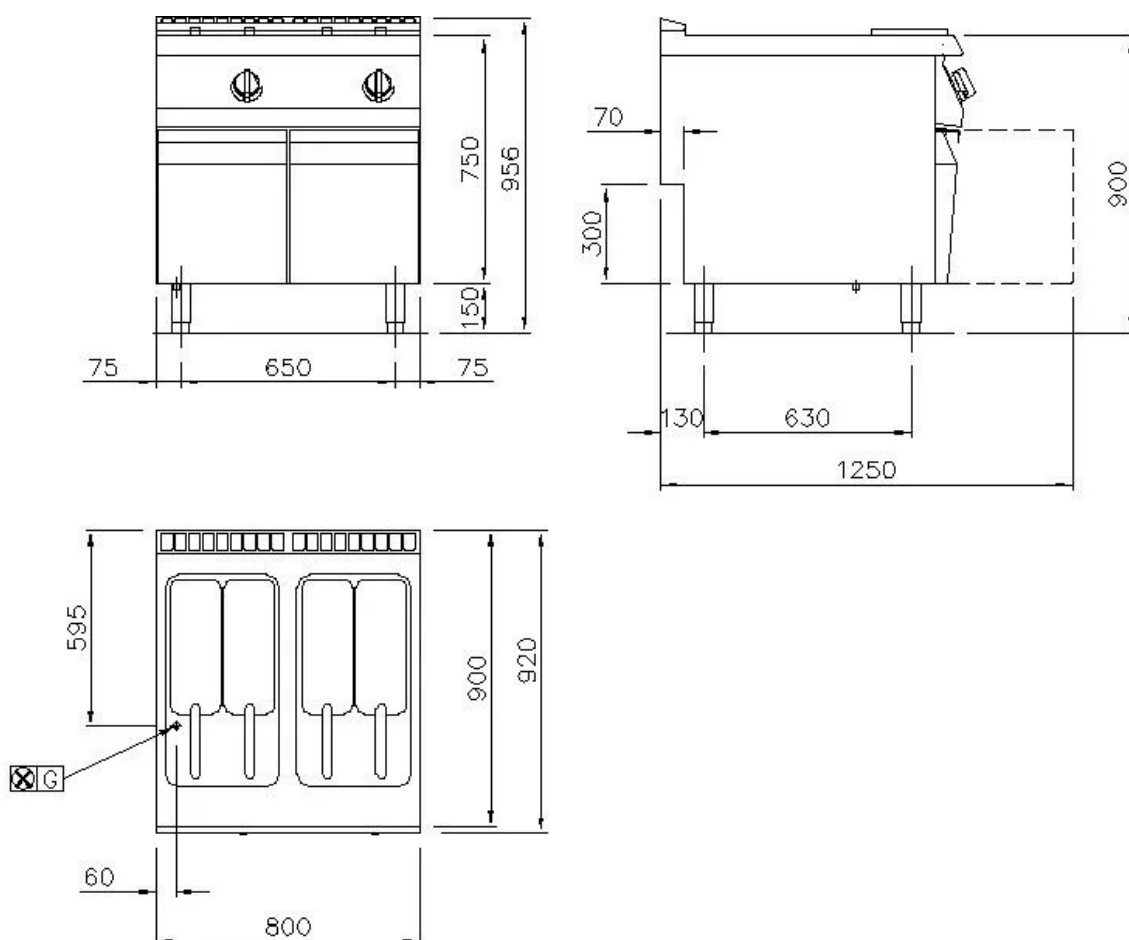

Ø 1/2" 100 mm

NOTES FOR THE INSTALLER:

All water and gas connections must be fitted with a shut-off valve or ball valve. Main gas connections must be provided of closing gate device.

Gas connections must not use welded tubes.

Gas connections must be jacketed according to current rules in the country.

Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght (except where otherwise required in the drawing).

All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug. All electric connections must be provided of main switch.

The specification shown in this document are to be considered not bounding.

The company reserves the right to make technical changes at any moment.