

SERIES	PRODUCT FAMILY	VERSION	MODEL
700	GRIDDLES	GAS	NEBG74GLRX

DESCRIPTION

GAS FRY TOP 80 CM SMOOTH ON OPEN MODULE
AISI 430



TECHNICAL DATA:

STRUCTURE	OPEN BASE	PLATE SIZE	735x530 mm
WIDTH	800 mm	NR. COOKING ZONES	2
DEPHT	730 mm		
HEIGHT	900 mm		
NET WEIGHT	94 kg		
VOLUME	0.5 m3		
GAS POWER	12 kW		

SERIES	PRODUCT FAMILY	VERSION	MODEL
700	GRIDDLES	GAS	NEBG74GLRX

FEATURES:

Gas Fry-Top, two independent cooking zones with 2/3 smooth 1/3 ribbed, tilted hotplate, Monoblock unit on open base. Cook top made of stainless steel AISI 304, thickness 15/10, pre-fitted for head-to head connection. Hotplate lowered 4 cm compared to worktop, sealed and welded for easy cleaning. Satin finish cooking surface, 6.5 cm cooling zone in the front part of the hotplate. Round grease drain hole, diam. 4 cm. Fat tray with a capacity of 2.5 lt. Heating by means of steel burner with stabilized flame, flames in 2 branches 4 rows for each zone, incl. pilotflame and safety thermocouple. Gas supply controlled by safety tap with thermocouple. Cooking temperature is set manually within a temperature range from 200 to 400 °C. Automatic ignition via piezoelectric device with waterproof cap. Cooking surface 33,5x53 cm. Cooking surface 73.5x53 cm. Height-adjustable feet in stainless steel. Scraper for cooking plate included.

STANDARD ACCESSORIES:


• SCRAPER FOR FRY TOP	RBLR
-----------------------	------

OPTIONAL ACCESSORIES:

• SCRAPER FOR FRY TOP	RBLR
• PLATE CLEANING CAP	KFTT
• SPLASHBACK 800	KFTP81

SERIES	PRODUCT FAMILY	VERSION	MODEL
700	GRIDDLES	GAS	NEBG74GLRX

INSTALLATION SCHEME

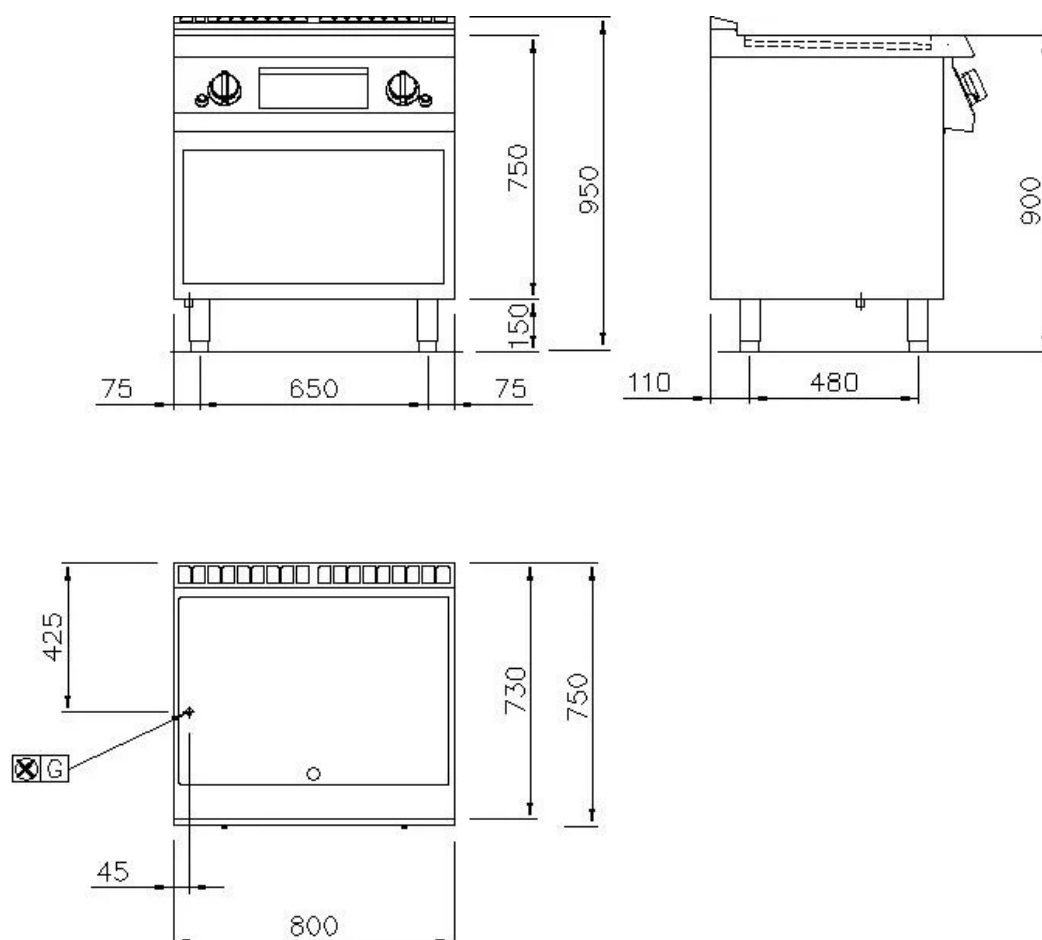

	E1	SOCKET
	AF	COLD WATER
	AC	HOT WATER
	G	GAS
	S	DRAINING

Ø 1/2" 100 mm

NOTES FOR THE INSTALLER:

All water and gas connections must be fitted with a shut-off valve or ball valve.
Main gas connections must be provided of closing gate device.

Gas connections must not use welded tubes.

Gas connections must be jacketed according to current rules in the country.

Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght (except where otherwise required in the drawing).

All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.
All electric connections must be provided of main switch.

The specification shown in this document are to be considered not bounding.

The company reserves the right to make technical changes at any moment.