

SERIES	PRODUCT FAMILY	VERSION	MODEL
700	GRILL	ELECTRIC	NEGVRE74G

DESCRIPTION

ELECTRIC GRILL 80 CM ON OPEN BASE



TECHNICAL DATA:

STRUCTURE	OPEN BASE
WIDTH	800 mm
DEPHT	730 mm
HEIGHT	900 mm
NET WEIGHT	53 kg
VOLUME	0.5 m3
ELECTRIC POWER	8.16 kW
PHASE	3N
FREQUENCY	50/60 Hz
VOLTAGE	400 V

SERIES	PRODUCT FAMILY	VERSION	MODEL
700	GRILL	ELECTRIC	NEGVRE74G

FEATURES:


Electric Grill Monoblock unit, two cooking zones. Stainless steel top (AISI 304), thickness 15/10, pre-fitted for head-to-head connection. Cooking occurs by direct contact on the electric resistances. Splashback up-stand on three sides, height 13.5 cm, made of stainless steel AISI 304. Removable tray for grease and water positioned underneath the heating elements. The water cools the cooking fats and by evaporating it cooks the foods smoothly. Control unit placed on the fixed front panel. Heating by means of electric shielded electrical resistances INCOLOY. They can be lifted to make cleaning easier. Activation and set up of the heating process via thermostat. An orange signal light appears when the appliance is turned on and operating. Height-adjustable feet in stainless steel. Scraper for grid included.

STANDARD ACCESSORIES:

OPTIONAL ACCESSORIES:

SERIES	PRODUCT FAMILY	VERSION	MODEL
700	GRILL	ELECTRIC	NEGVRE74G

INSTALLATION SCHEME

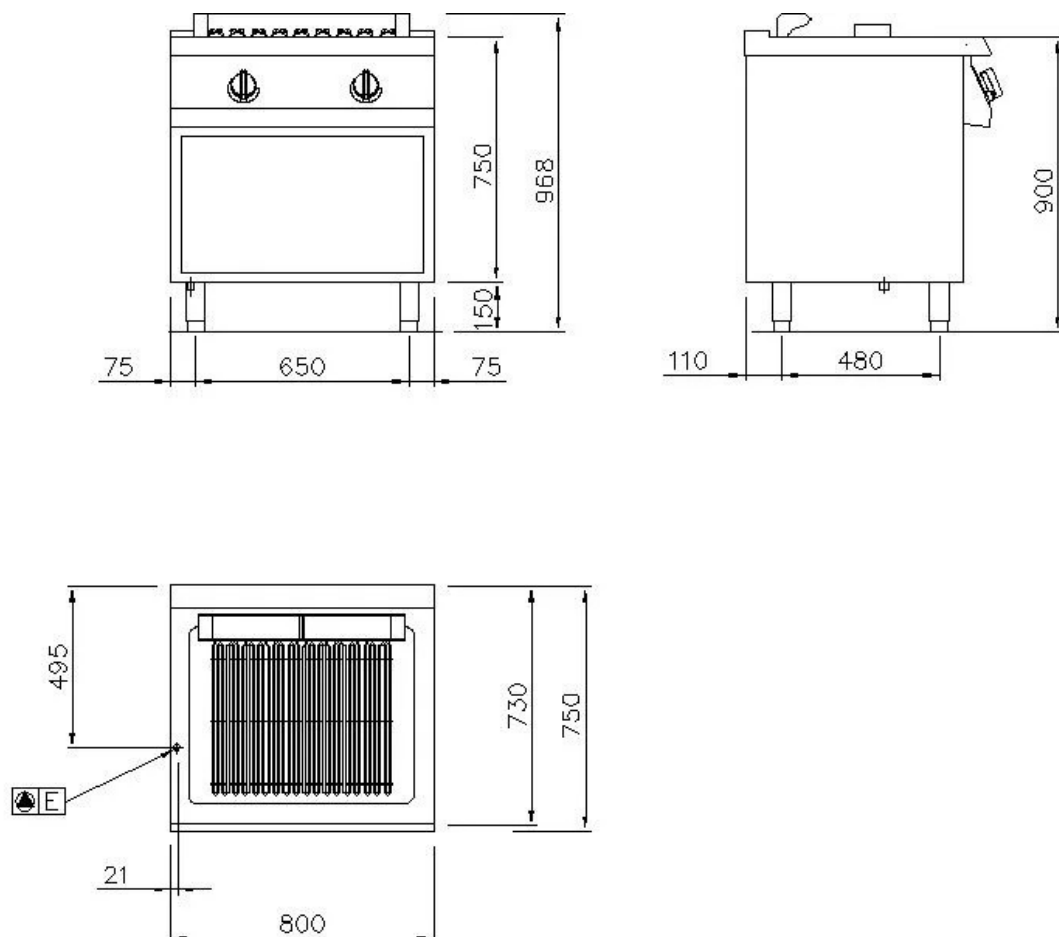

	E1	SOCKET
	AF	COLD WATER
	AC	HOT WATER
	G	GAS
	S	DRAINING

400 V

3N

NOTES FOR THE INSTALLER:

All water and gas connections must be fitted with a shut-off valve or ball valve.
Main gas connections must be provided of closing gate device.

Gas connections must not use welded tubes.

Gas connections must be jacketed according to current rules in the country.

Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght (except where otherwise required in the drawing).

All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.
All electric connections must be provided of main switch.

The specification shown in this document are to be considered not bounding.

The company reserves the right to make technical changes at any moment.