

|            |                       |                 |                |
|------------|-----------------------|-----------------|----------------|
| SERIES     | PRODUCT FAMILY        | VERSION         | MODEL          |
| <b>700</b> | <b>WARM CONTAINER</b> | <b>ELECTRIC</b> | <b>NERP72G</b> |

## DESCRIPTION

ELECTRIC CHIPS SCUTTLE ON OPEN BASE



## TECHNICAL DATA:

| STRUCTURE      | OPEN BASE | WELL CAPACITY | GN 1/1 |
|----------------|-----------|---------------|--------|
| WIDTH          | 400 mm    |               |        |
| DEPHT          | 730 mm    |               |        |
| HEIGHT         | 900 mm    |               |        |
| NET WEIGHT     | 31 kg     |               |        |
| VOLUME         | 0.26 m3   |               |        |
| ELECTRIC POWER | 2 kW      |               |        |
| FREQUENCY      | 50/60 Hz  |               |        |
| VOLTAGE        | 230 V     |               |        |

| SERIES     | PRODUCT FAMILY        | VERSION         | MODEL          |
|------------|-----------------------|-----------------|----------------|
| <b>700</b> | <b>WARM CONTAINER</b> | <b>ELECTRIC</b> | <b>NERP72G</b> |

## FEATURES:


Electric Chip Scuttle, Monoblock unit on open base. Cook top made of stainless steel AISI 304, thickness 15/10, pre-fitted for head-to head connection. Heating by means of lower electrical resistance with temperature setting range from 30°C to 90°C. Upper infrared heating with On/Off switch. Container GN 1/1 h=15 cm. Height-adjustable feet in stainless steel.

## STANDARD ACCESSORIES:

## OPTIONAL ACCESSORIES:

| SERIES | PRODUCT FAMILY | VERSION  | MODEL   |
|--------|----------------|----------|---------|
| 700    | WARM CONTAINER | ELECTRIC | NERP72G |

## INSTALLATION SCHEME

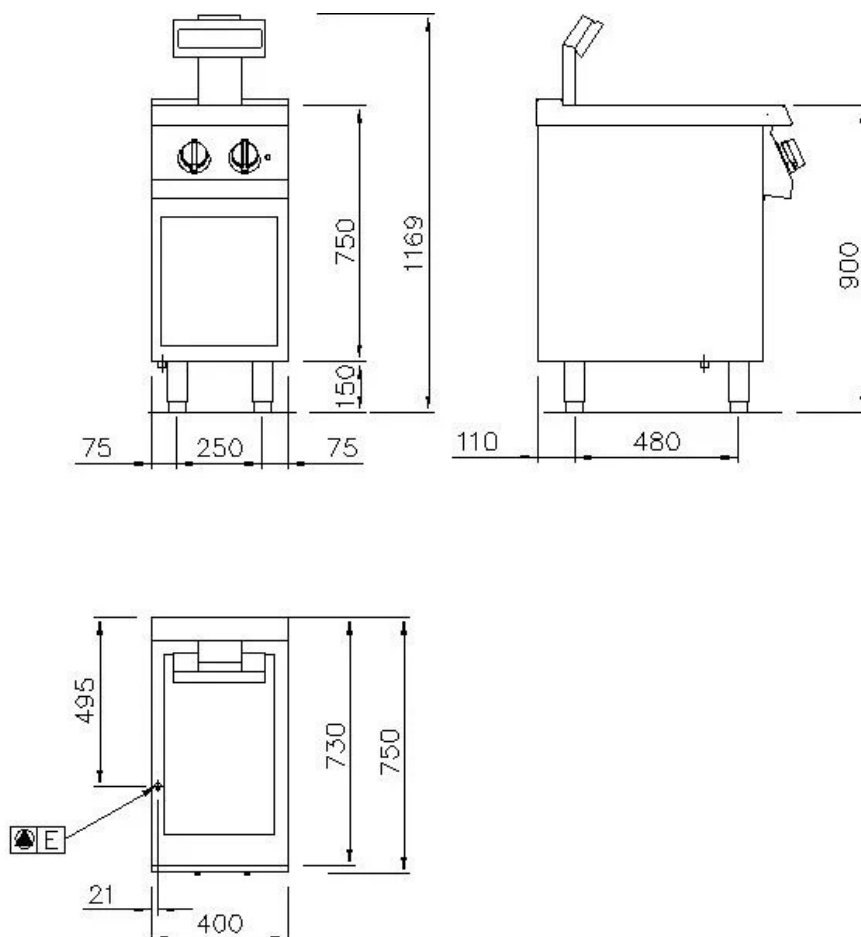

|  |    |            |
|--|----|------------|
|  | E1 | SOCKET     |
|  | AF | COLD WATER |
|  | AC | HOT WATER  |
|  | G  | GAS        |
|  | S  | DRAINING   |

230 V

### NOTES FOR THE INSTALLER:

All water and gas connections must be fitted with a shut-off valve or ball valve.  
Main gas connections must be provided of closing gate device.

Gas connections must not use welded tubes.

Gas connections must be jacketed according to current rules in the country.

Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght ( except where otherwise required in the drawing).

All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.  
All electric connections must be provided of main switch.

The specification shown in this document are to be considered not bounding.

The company reserves the right to make technical changes at any moment.