

SERIES	PRODUCT FAMILY	VERSION	MODEL
700	BAIN MARIES	ELECTRIC	NEME72G

DESCRIPTION

ELECTRIC BAIN-MARIE 40 CM ON OPEN MODULE



TECHNICAL DATA:

STRUCTURE	OPEN BASE	WELL CAPACITY	7,5 (22,5 MAX)
WIDTH	400 mm		
DEPHT	730 mm		
HEIGHT	900 mm		
NET WEIGHT	31.5 kg		
VOLUME	0.26 m3		
ELECTRIC POWER	1.8 kW		
FREQUENCY	50/60 Hz		
VOLTAGE	230 V		

SERIES	PRODUCT FAMILY	VERSION	MODEL
700	BAIN MARIES	ELECTRIC	NEME72G

FEATURES:

Electric Bain-Marie, Monoblock unit on open base. Cook top made of stainless steel AISI 304, thickness 15/10, pre-fitted for head-to head connection. Stainless steel basin (AISI 304) with radiused inner profile for easy cleaning. Sloping basin bottom to optimize water drainage. Dimensions 1 x GN 1/1. For containers with up to 15 cm max. height. Heating by means of shielded electrical resistance located underneath the basin. Water temperature set via thermostat within an adjustment range between 30°C to 90°C. Safety thermostat switches on if heating is activated with empty basin, manual reset. An orange signal light on the control panel switches on when heating is activated. Appliance automatic water loading mechanism via electric valve and water drainage via vertical overflow drain. Height-adjustable feet in stainless steel.


STANDARD ACCESSORIES:

OPTIONAL ACCESSORIES:

• CROSS BAR	EXB-TB
• Stainless steel LID	0102289
• Stainless steel LID	0102290
• Stainless steel LID	0102291
• Stainless steel LID	0102292
• Stainless steel LID	0102294
• Stainless steel CONTAINER	0102261
• Stainless steel CONTAINER	0102262
• Stainless steel CONTAINER	0102263
• Stainless steel CONTAINER	0102264
• Stainless steel CONTAINER	0102266

SERIES	PRODUCT FAMILY	VERSION	MODEL
700	BAIN MARIES	ELECTRIC	NEME72G

INSTALLATION SCHEME

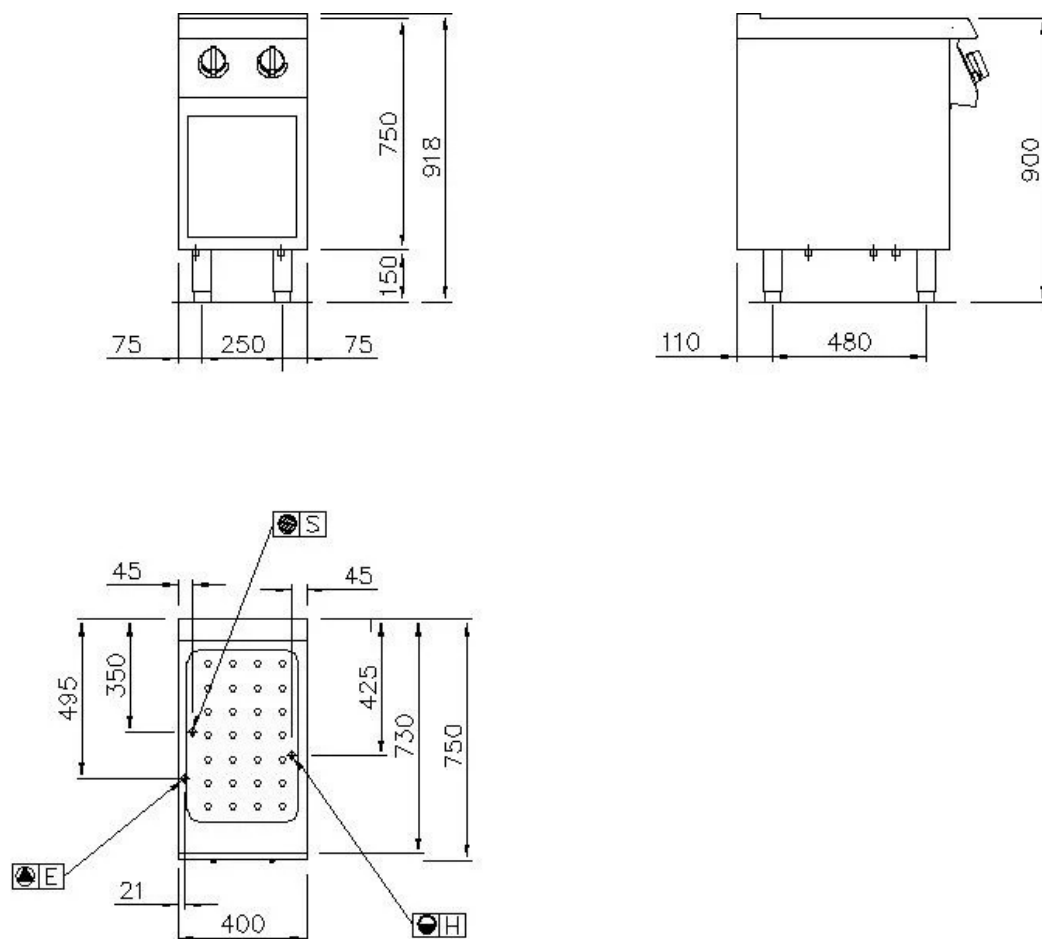

	SOCKET	230 V	
	COLD WATER	Ø 3/4"	100 mm
	HOT WATER		
	GAS		
	DRAINING	Ø 40mm	0 mm

NOTES FOR THE INSTALLER:

All water and gas connections must be fitted with a shut-off valve or ball valve.
Main gas connections must be provided of closing gate device.

Gas connections must not use welded tubes.

Gas connections must be jacketed according to current rules in the country.

Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght (except where otherwise required in the drawing).

All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.
All electric connections must be provided of main switch.

The specification shown in this document are to be considered not bounding.

The company reserves the right to make technical changes at any moment.