

SERIES	PRODUCT FAMILY	VERSION	MODEL
700	FRYER	ELECTRIC	NEFE72115

DESCRIPTION

ELECTRIC FRYER 1 WELL 15 LT.



TECHNICAL DATA:

STRUCTURE	FLOOR	WELL CAPACITY	15 LT.
WIDTH	400 mm	WELL DIMENSIONS	250x318x525 mm
DEPHT	730 mm		
HEIGHT	900 mm		
NET WEIGHT	40.5 kg		
VOLUME	0.26 m3		
ELECTRIC POWER	12 kW		
PHASE	3N		
FREQUENCY	50/60 Hz		
VOLTAGE	400 V		

SERIES	PRODUCT FAMILY	VERSION	MODEL
700	FRYER	ELECTRIC	NEFE72115

FEATURES:

Electric Fryer, single well, Monoblock unit on cupboard with hinged door. Cook top made of stainless steel AISI 304, thickness 15/10, pre-fitted for head-to head connection. Pressed well made of stainless steel AISI 304, with radiused inner profile. Well capacity in litres 15. Well with wide expansion area in the front part for oil and foam and extended cooling area in the front part for collection of food particles. Heating by means of shielded electrical resistance in stainless steel AISI 304 positioned inside the well. The resistances rotates over 90° to make cleaning procedures easier. An orange signal light on the control panel signals that heating has been activated. Oil temperature inside the well controlled via mechanical thermostat, with a setting range between 100 and 185 °C. Manually resettable safety thermostat. Extractable filter, basket and lid and collector for drain cock included. Height-adjustable feet in stainless steel.



STANDARD ACCESSORIES:

OPTIONAL ACCESSORIES:

• OIL DRIP TRAY	EBAC7
• COLLECTOR FOR FRYING RESIDUE	NXFIV15G
• 1/2 basket for 15 liters tank capacity	ECF15M

SERIES	PRODUCT FAMILY	VERSION	MODEL
700	FRYER	ELECTRIC	NEFE72115

INSTALLATION SCHEME

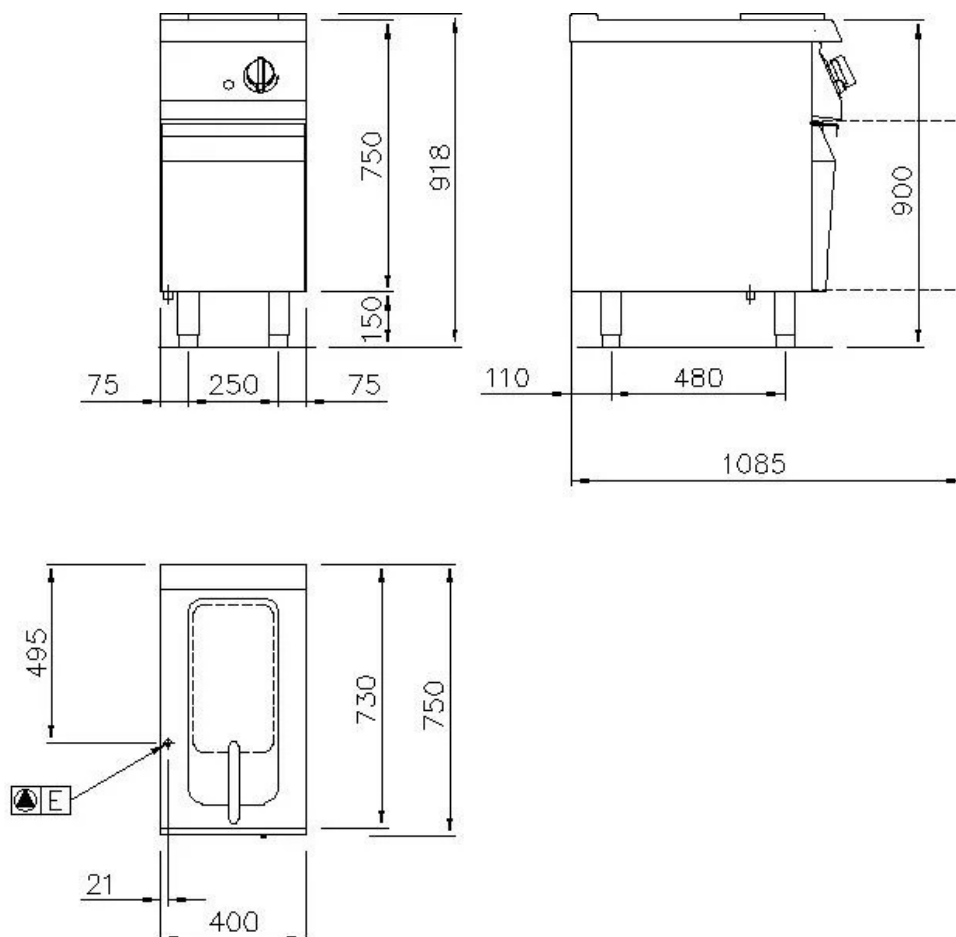

400 V

3N

NOTES FOR THE INSTALLER:

All water and gas connections must be fitted with a shut-off valve or ball valve.
Main gas connections must be provided of closing gate device.

Gas connections must not use welded tubes.

Gas connections must be jacketed according to current rules in the country.

Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght (except where otherwise required in the drawing).

All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.
All electric connections must be provided of main switch.

The specification shown in this document are to be considered not bounding.

The company reserves the right to make technical changes at any moment.