

SERIES	PRODUCT FAMILY	VERSION	MODEL
900	PANS	GAS	NEPG9I10

DESCRIPTION

GAS PAN INDIRECT HEATING 100 LITRES



TECHNICAL DATA:

STRUCTURE	100 LT.	WELL CAPACITY	100 LT.
WIDTH	800 mm	WELL DIMENSIONS	Ø 595x380 mm
DEPHT	900 mm		
HEIGHT	900 mm		
NET WEIGHT	137 kg		
VOLUME	1.1 m3		
GAS POWER	21 kW		
ELECTRIC POWER	0.2 kW		
FREQUENCY	50/60 Hz		
VOLTAGE	230 V		

SERIES	PRODUCT FAMILY	VERSION	MODEL
900	PANS	GAS	NEPG9I10


FEATURES:

"Boiling Pan Gas, Monoblock unit with indirect heating made of stainless steel AISI 304. Stainless steel top (AISI 304), thickness 20/10, pre-fitted for head-to-head connection. Pan bottom made of stainless steel AISI 316L, polished, sides made of stainless steel AISI 304. 100 lt. - well capacity. Hot or cold water is loaded through electric valve activated by a switch, fixed water tap positioned on the top. 2" safety drain tap with thermostable grip. Lid opening 90°, balanced by front and side handle. Indirect heating by low pressure steam generated thanks to the water contained in the interspace of the kettle: pressure gauge assisted conduction, safety valve and automatic drainage valve. Control system with signal light in case of low water levels in the interspace, heating is activated again as soon as water is refilled up to standard level. Indirect heating by means of stainless steel burners (AISI 304) positioned on the outside of the interspace. Safety gas valve on the front panel, electric ignition. Thick insulating panels provide thermal insulation for the kettle. Temperature controlled via power regulator. Signal light checks whether the appliance is operating correctly. Kettle diameter 60 cm. Model with safety thermostat and rest button accessible to the user. Height-adjustable feet in stainless steel."

OPTIONAL ACCESSORIES:

SERIES	PRODUCT FAMILY	VERSION	MODEL
900	PANS	GAS	NEPG9110

INSTALLATION SCHEME

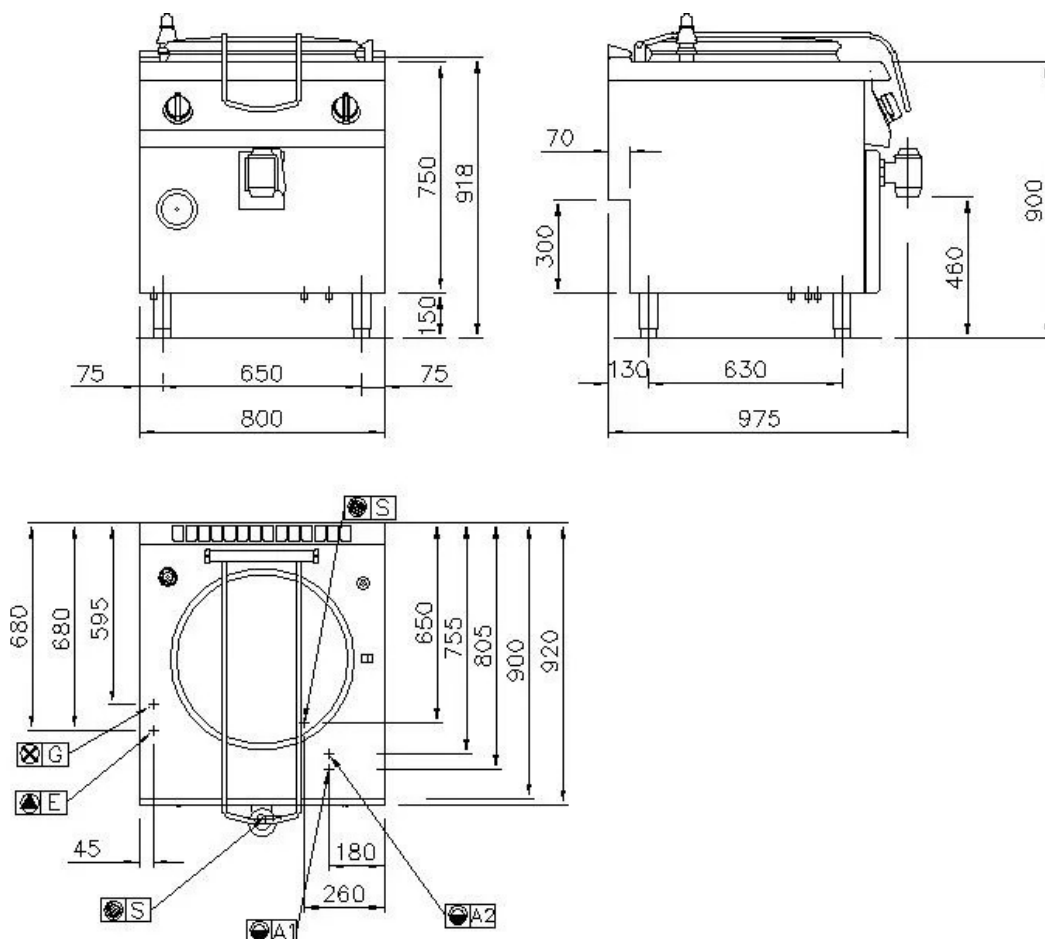

	SOCKET	230 V	
	COLD WATER	Ø 3/4"	100 mm
	HOT WATER	Ø 3/4"	100 mm
	GAS	Ø 1/2"	100 mm
	DRAINING	Ø 40MM	0 mm

NOTES FOR THE INSTALLER:

All water and gas connections must be fitted with a shut-off valve or ball valve.
Main gas connections must be provided of closing gate device.

Gas connections must not use welded tubes.

Gas connections must be jacketed according to current rules in the country.

Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght (except where otherwise required in the drawing).

All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.

All electric connections must be provided of main switch.

The specification shown in this document are to be considered not bounding.

The company reserves the right to make technical changes at any moment.