







# **Characteristics**



## **ELECTRONIC AUTO-LEVEL**

Through an electronic level probe the boiler is automatically filled and maintained to the right filling level.



# **ACTIVATED ELECTRONIC**

PRE-INFUSION
Management of the delayed activation of water solenoid in the first phase



**DOUBLE READING GAUGE** Allows to control at the same time the boiler pressure and the



### **EASY SERVICE**

Fast access to the internal parts for quick and easy technical service.



# AUTOMATIC CLEANING CYCLE Process for coffee







\_Optional

### **AUTOSTEAM**

Steam wand characterized by an electronic system that allows to mount and/or heat milk at the set temperature.



## **CUP WARMER**

Dedicated resistor to keep all the cups at the optimal temperature.








# SANREMO

### **Versions**

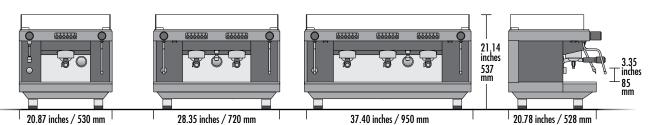

### 1 group SED/SAP

1 steam tap 1 water tap

1 one-cup portafilters 1 two-cup portafilters

### 2 group SED/SAP


2 steam taps water tap

one-cup portafilters 2 two-cup portafilters


### 3 group SED/SAP

2 steam taps l water tap

one-cup portafilters 3 two-cup portafilters







### **COMPACT** VERSION

### 2 group

2 steam taps 1 water tap


1 one-cup portafilters 2 two-cup portafilters

# **TALL** VERSION

2-3 group SED SAP

_Technical data		1 group	2 group	3 group	compact
voltage	V		220-240 1N /	/ 380-415 3N	
power imput	kW	2.3	3.3	6	2.7
steam boiler capacity	US gal / It	1.19 / 4.5	2.64 / 10	3.7 / 14	1.85 / 7
steam boiler power	kW	2.15	2.95	5.6	2.5
pump power	kW	0.13	0.13	0.13	0.13
net weight	lb / kg	90 / 41	121 / 55	152 / 69	99 / 45







### **PERSONALISED GRAPHICS**









For more information about our coffee machines please contact us at export@sanremomachines.com











SANREMO coffee machines s.r.l. Via Giacomo Bortolan 52 31050 Vascon di Carbonera [TV] — ITALY T +39 0422 448900 F +39 0422 448935 www.sanremomachines.com