


# INOX | Blast Chillers

Blast chillers

## RF 23A



### DETAILS

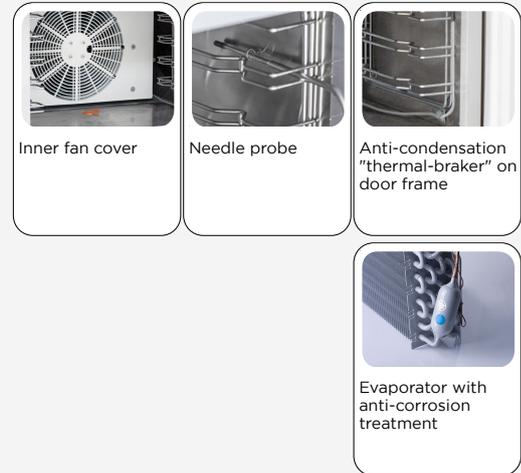


### GENERAL FEATURES

- GN2/3 Counter top Blast chiller
- Stainless Steel exterior and interior
- Ventilated Cooling with Manual defrost
- Plastic thermal-braker as chamber body frame (Heated wire)
- Evaporator with anti-corrosion treatment
- Foaming Agent Cyclopentane (60mm per side - CFC Free)
- Digital Thermostat with Buzzer alarm
- Opening door alarm
- Error message directly in the display
- Chilling chamber in stainless steel
- Door microswitch for stop inner fan with open door
- Needle probe fitted as standard
- Removable Gasket
- N.4 Adjustable feet
- Temperature controlled or temporized blast chilling cycle
- Automatic storage mode at the end of blast chilling cycle
- Energy efficiency class: -

### TECHNICAL SPECIFICATIONS

Capacity	Ch.7Kg/Fr.5Kg
Temperature	+10°C ~ -38°C
Consumption	N/A kWh/24h
Rated Power	420 W
Noise level	55 dB(A)
Net Weight	44 Kg
Gross Weight	52 Kg
External Dimensions (WxDxH mm)	660x640x437
Internal Dimensions (WxDxH mm)	340x365x270
Packaging dimensions (WxDxH mm)	700x680x525
Loading quantities 20'/40'/40'HQ	96/204/255

### PRODUCT DIMENSIONS

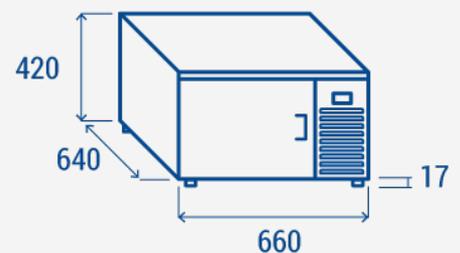

### CERTIFICATION

CE RoHS

